


DIVELINK®

Surface to Two Diver Intercom Model COM-S-HW2

The COM-S-HW2 Intercom unit provides the following features for the Commercial Diver:

- Electrically Isolated Connection to divers (cannot be shocked like other systems)
- Diver disconnected alarm (activates if com line is disconnected)
- Diver not breathing alarm (activates if diver stops breathing)
- Noise Suppression (reduces breathing noises, voice still loud and clear)
- Robust waterproof self closing panel connectors
- Audio In - to pipe down music to diver from portable music player
- Record Out - to record surface to diver communications
- External Speaker built in as well as Speaker Out for deck speaker
- May be powered by any source: boat or rechargeable battery or both
- Adapters to retrofit to other communication systems

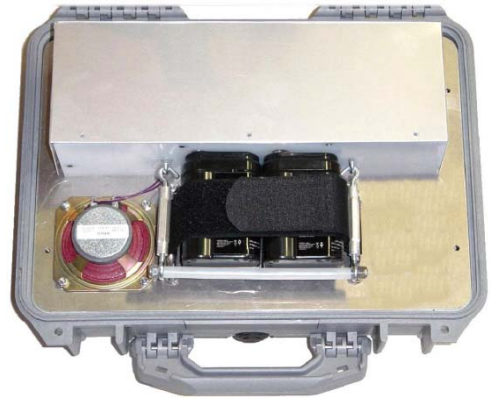

DIVELINK®

Surface to Two Diver Intercom Model COM-S-HW2

System Components:



COM-S-HW2



**HEADSET for
TENDER**

EAR-MIC-HDS



**Audio Cable
CAB-RECORD**



PTT Microphone

MIC-S08



**Audio Cable
CAB-PLAY**



**12 Volt
Charger**


CHG-HW



**Alternative
12 Volt
Jumpers
for Charge**

CHG-JPR

All the items shown above are shipped when the Surface to Two Diver Intercom is ordered.

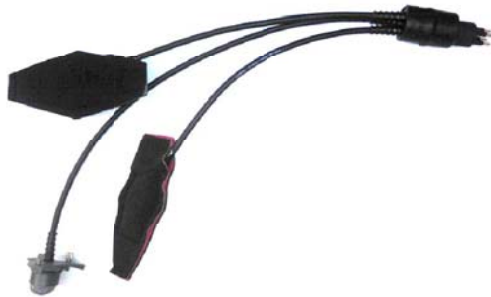

EAR-MIC-HW



HW-WHIP



HW-CABLE-300-x*

Order separately Items shown ABOVE.

Some full face masks are available from DIVELINK including Kirby Morgan M48.

*With strength member –S option, without strength member –NS.

As an alternative, DIVELINK can add connectors to your existing communications cable